




INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

Best Available Copy



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

11 June 2004

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



1/77

14MAY03 E807102-1 000239
P01/7700 0.00-0311036.8

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

AS/GOW/DH/P12709GB

2. Patent application number

(The Patent Office will fill in this part)

0311036.8

14 MAY 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

McAlpine & Co Limited.
Kelvin Avenue
Hillington
Glasgow
G52 4LF

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

594358002
UK

4. Title of the invention

Strainer Plug Waste

5. Name of your agent (if you have one)

Marks & Clerk

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

19 Royal Exchange Square
Glasgow
G1 3AE

Patents ADP number (if you know it)

547002 18006

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 11

Claim(s) 4

Abstract 1

Drawing(s) 2 + 2 *SV*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature *M. Shanks*
MARKS & CLERK

Date
12/5/03

12. Name and daytime telephone number of person to contact in the United Kingdom. Andrew Shanks (0141) 221 5767

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

STRAINER PLUG WASTE

FIELD OF THE INVENTION

The present invention relates to a combined plug and strainer for use in a waste, such as a sink or bath waste.

5 BACKGROUND OF THE INVENTION

It is known to use strainer members in combination with plugs in sink wastes, to prevent the entry of solid matter into the sink waste, which may otherwise block the waste outflow pipe. Such strainers are of particular use in
10 kitchen sinks, which are likely to have food particles and the like falling into the waste. Conventional strainers are typically in the form of a disc formed with a number of holes therethrough which is placed over the waste.

In certain variants of conventional strainers, the
15 disc is cupped in form, and includes upwardly extending peripheral walls. The shape of the strainer allows it to fit snugly into the opening of the waste outlet, and so improves the straining capability of the strainer.

The cupped form of strainer may also be provided in
20 combination with a plug. The plug is typically in the form of an elastomer body or ring which is mounted on the underside of the strainer. The plug and strainer normally are placed within the waste outlet such that the plug closes the outlet. Partial lifting of the strainer and plug
25 upwards separates the plug from the waste outlet and allows waste water to flow through the strainer to the waste

outlet, so capturing any solid matter in the strainer. The strainer and plug may then be simply lifted further from the waste outlet to remove the strainer and plug altogether, and to permit cleaning of the strainer.

5 However, such combined strainers and plugs suffer from a number of disadvantages. Chief among these is that the plug and strainer must be manually lifted and removed from the waste. This can prove difficult for many users, and in particular for users of restricted dexterity, who may not
10 be able to grasp the plug and strainer securely to permit removal; this may require considerable force, due to the weight of water tending to maintain the plug closed and the difficulty in separating the close fitting sealing surfaces.

15 Plugs which can be operated mechanically, for example lever operated or 'pop-up' plugs, which are more suitable for such users, are known; however it has not hitherto been possible to provide a mechanically operated plug in combination with a strainer which is suitable for operation
20 by persons of reduced dexterity. It is among the objects of embodiments of the present invention to provide such an arrangement.

SUMMARY OF THE INVENTION

 According to the present invention, there is provided
25 a plug comprising a seal; a stem for being received in an outlet waste and coupled to the seal, the stem being

selectively adjustable in length for selectively engaging the seal with a portion of an outlet waste to open and seal an outlet waste; and a strainer member coupled to one of the seal and the stem.

5 Thus, the present invention provides a plug which may be opened and closed simply by varying the length of the stem, and which is provided with a strainer member. In certain embodiments of the invention, the stem is arranged to be variable in length in response to an axial force
10 exerted on the stem; this allows the plug to be opened or closed simply with a downwards push on the plug, such that the plug is suitable for use by persons of restricted dexterity.

 A plug according to certain embodiments of the present
15 invention may in use define three working positions - closed; open and straining; and fully removed. Further, the manner of opening the plug by means of the stem provides a system whereby a user does not need to exert undue force against the weight of water to open the plug. This provides
20 a range of working conditions which has not hitherto been possible with conventional strainer plugs, and makes the plug more suitable for use by persons of restricted dexterity.

 Preferably the stem defines a vertical axis, and
25 extends axially downwardly of the seal, with the strainer being located axially upwardly of the seal. Thus, in use

the strainer will be located uppermost in the plug assembly, with the seal being located below the strainer within the waste outlet. This configuration allows the user to obtain ready access to the strainer portion of the plug for cleaning and maintenance. This arrangement has not hitherto been possible with conventional mechanically actuated plugs. Preferably the strainer in use in a closed position is located flush with or below a waste outlet; this provides an aesthetically-pleasing arrangement as well as avoiding obstructing use of the sink or receptacle in which the plug is located.

In alternative embodiments, the seal may be located axially upwardly of the strainer, such that the strainer is located in use below the seal. This allows the seal to be made larger to fully seal a waste opening, while the strainer may be located within the waste.

Preferably the strainer is removable from the stem or the seal to which it is attached. This allows the strainer to be removed for cleaning or maintenance while still permitting regular use of the seal arrangement.

Preferably the strainer is configured to conform to the shape of an opening of a waste outlet; the strainer will thus be received snugly within the waste outlet.

Preferably the plug further comprises a surface for contact with a user's hand. The surface is conveniently in the form of a pad or button, and provides a portion of the

plug which a user may depress in order to selectively alter the length of the stem. The surface may be provided on a portion of the plug which is formed to permit grasping thereof; this allows a user to grip or grasp the surface for removal of the plug from a waste or the like. The surface may also or instead be provided on a portion of the plug which is arranged to retain the strainer and/or the seal on the stem; in such embodiments, the surface may be removable from the plug to permit disassembly of the plug.

10 In further embodiments of the invention, the surface may be in the form of a pad dimensioned to substantially cover a waste outlet opening; this serves to conceal the strainer and seal and allows for decorative finishes to be applied if desired.

15 Preferably the stem comprises two substantially concentric portions biased to a first length by means of a spring or the like. The stem may further comprise a latch means arranged to hold the portions in a second length against the spring bias. Application of a force to the plug may cause the latch to engage or disengage, so altering the length of the stem. Preferably the stem may be either extended or contracted by the application and release of a force in a single direction. That is, the plug may be switched from open to closed positions, and vice versa; by
25 for example pushing down on and then releasing the plug. Thus, no complex movements are necessary to operate the

plug.

Preferably the stem length may be varied by the application of less than around 5 lbs (2.2 kg) of force; this level of force may be exerted by a substantial
5 majority of users, even those of restricted dexterity, and so presents little difficulty in the operation of the plug.

Preferably the seal is resilient, and preferably comprises a resilient material; conveniently elastomer. The seal preferably comprises a circular flange which in use
10 engages with a portion of a waste outlet.

Preferably the stem is adapted to be secured to an outlet waste; alternatively the stem may be freely received in an outlet waste. This second arrangement permits the entire plug assembly to be easily removed for cleaning or
15 maintenance. In certain embodiments the stem comprise means for selectively securing the stem to an outlet waste; for example, the stem may include a threaded member normally covered with a non-threaded sleeve; the stem will normally be freely received within the outlet waste. Removal of the
20 non-threaded sleeve exposes a threaded member allowing the stem to be secured to a threaded portion of a waste.

The plug may be provided in combination with a waste outlet.

BRIEF DESCRIPTION OF THE FIGURES

25 These and other aspects of the present invention will now be described by way of example only and with reference

to the accompanying Figures, in which

Figure 1 shows a top view of a plug in accordance with an embodiment of the present invention in combination with a waste;

5 Figure 2 shows a sectional side view of the plug and waste of Figure 1; and

Figure 3 shows a sectional side view of an alternate embodiment of a plug in accordance with the present invention.

10 DETAILED DESCRIPTION OF THE FIGURES

Referring to Figures 1 and 2, these show a combination strainer and seal plug 10 in accordance with an embodiment of the invention. The plug 10 is shown in combination with a waste outlet 12, which includes an interior surface portion 14 and an exterior shell 16. The shell 16 includes
15 a threaded portion 18 for connection to a waste pipe system.

The plug 10 itself includes a two-part plastics stem 20a, 20b, the lower portion of which carries a protrusion
20 22 which is received within a threaded sleeve 24. The threaded sleeve 24 engages with an opening within the waste outlet 12 to secure the plug 10 to the outlet 12.

On the upper portion 20a of the plastic stem is threadedly mounted a ring 26 which carries an elastomer
25 seal member 28 and a strainer member 30. The strainer member is generally circular and cup-shaped, and includes a

peripheral wall 34 and a number of openings 36. The cup shape of the strainer 30 allows it to sit flush with the waste opening 12, as can be best seen in Figure 2.

Above the ring 26 and also threadedly mounted to the plastic stem 20a is a knob 32. The knob is of relatively large diameter compared with conventional plugs, and so is easier to grip for users. The knob may be removed from the stem to permit removal of the ring 26 and either or both of the strainer 30 and seal 28, for maintenance and cleaning.

In use, the plug 10 may be operated as follows. The plastic stem 20a, 20b includes a compression spring and a cam track and stop member (not shown). The lower portion of the stem 20b is telescopically received within the upper portion 20a, and the compression spring biases the lower portion 20b towards an extended position.

Exertion of pressure on the stem 20a, 20b by means of a user pressing down on the knob 32 compresses the stem and allows the stop member to engage with the cam track in a first stop position. This retains the stem in a compressed position against the bias of the spring. In this position the seal 28 is in engagement with the inner portion of the waste outlet 14, such that the outlet is sealed.

To separate the seal from the outlet 14 and to allow water to drain through the waste, the user presses on the knob 32 once more. The stem is compressed again, and the stop member is released from the first stop position. The

spring pushes the stem to an extended position, and the stop member moves along the cam track to engage in a second stop position. The seal 28 is thus spaced from the outlet surface (in the position shown in Figure 2) to permit water
5 to drain through the waste; the presence of the strainer 30 ensures that water first has to pass through the strainer which removes large particles such as food from the draining water.

Referring now to Figure 3, this shows a sectional side
10 view of an alternate embodiment of the present invention. In this embodiment, the seal 128 is located above the strainer 130. The seal 128 will thus engage in use with an upper flange of a waste outlet (not shown) to seal the plug. The knob 132 is sized to conform with a waste outlet
15 opening, and will in use conceal the seal 128 and strainer 130 from a user's view. The knob 132 may be made of a decorative material, to provide an improved aesthetic appeal for the plug. This larger size of knob may of course
be used with the embodiment of Figures 1 and 2 if desired.

20 The plastics stem 120a, 120b of this embodiment carries a protrusion 122 which in normal use is slidably received into a sleeve of the waste outlet (not shown), to locate the plug within the waste outlet. The protrusion 122 is threadedly attached to a threaded lower portion 140 of
25 the stem 120b; the protrusion may thereby be removed if desired to expose the threaded portion 140. This threaded

portion 140 may then be threadedly engaged with a correspondingly-threaded sleeve (not shown) provided on a waste outlet to secure the plug in the waste outlet. This is of benefit if a user wishes the plug to be non-removable
5 from the waste outlet. Again, this variant may be used with the embodiment of Figures 1 and 2 if desired.

It can be seen that the present invention provides a mechanically-operable plug arrangement which includes a strainer and which can be operated by persons of reduced
10 dexterity, since limited force and simple movements are required to open or close the plug, even when the plug must be opened against the weight of water. The plug may also in certain embodiments be removed altogether from the waste; the knob on the upper surface of the plug allows this to be
15 accomplished relatively easily. The location of the strainer on an upper portion of the plug in certain embodiments allows for ready access to the strainer for cleaning, while the seal and/or the strainer may be disassembled from the plug in certain embodiments if
20 desired.

The plug may be so constructed as to have the strainer lie flush with or below the waste outlet in the open and closed positions.

It will be understood that the foregoing is for
25 illustrative purposes only, and that the skilled person will be able to conceive of variations which may be made to

the described embodiment, without departing from the invention. For this reason, the scope of the invention should be determined with reference to the appended claims.

CLAIMS

1. A plug comprising a seal; a stem for being received in an outlet waste and coupled to the seal, the stem being
5 selectively adjustable in length for selectively engaging the seal with a portion of an outlet waste to open and seal an outlet waste; and a strainer member coupled to one of the seal and the stem.

10 2. The plug of claim 1, wherein the stem is adjustable in length in response to a compressive force exerted on the stem.

3. The plug of claim 1 or 2, wherein the stem defines
15 a vertical axis, and extends axially downwardly of the seal, with the strainer being located axially upwardly of the seal.

4. The plug of any preceding claim, wherein the
20 strainer is adapted for location at an uppermost portion of the plug, with the seal being adapted for location below the strainer within the waste outlet.

5. The plug of claim 4, wherein the strainer is
25 adapted for location flush with a waste outlet.

6. The plug of any of claims 1 to 3, wherein in use the seal is located on an upper portion of the plug, with the strainer being located below the seal within the waste outlet.

5

7. The plug of any preceding claim, wherein the strainer is removable from the stem or the seal to which it is coupled.

10 8. The plug of any preceding claim, wherein the strainer has a shape corresponding to the shape of an opening of a waste outlet.

9. The plug of any preceding claim, wherein the plug
15 further comprises a surface for contact with a user's hand.

10. The plug of claim 9, wherein the surface is in the form of a button.

20 11. The plug of claim 9 or claim 10, wherein the surface is provided on a portion of the plug formed to permit grasping thereof.

12. The plug of claim 9, 10, or 11, wherein the
25 surface is provided on a portion of the plug adapted to retain one of the strainer and the seal on the stem.

13. The plug of claim 12, wherein the portion of the plug is removable from the plug to permit disassembly of the plug.

5

14. The plug of any of claims 8 to 13, wherein the surface is dimensioned to substantially conceal a waste outlet opening in use.

10

15. The plug of any preceding claim, wherein the stem comprises two substantially concentric portions biased to a first length.

15

16. The plug of claim 15, wherein the stem further comprises a latch means arranged to hold the portions in a second length against the bias.

20

17. The plug of any preceding claim, wherein the stem may be extended and contracted by the application and release of a force in a single direction.

25

18. The plug of claim 17, wherein the stem length may be varied by the application of less than around 5 lbs (2.2 kg) of force.

19. The plug of any preceding claim, wherein the seal

comprises a resilient material.

20. The plug of any preceding claim, wherein the stem is adapted to be secured to an outlet waste.

5

21. The plug of claim 20, wherein the stem comprises a threaded member for engaging with a correspondingly-threaded member provided on a waste outlet.

10 22. The plug of claim 21, further comprising a non-threaded sleeve for engaging with the threaded stem member to allow the stem to be freely received in a waste outlet.



23. The plug of any of claims 1 to 19, wherein the
15 stem is adapted to be freely received in an outlet waste.

24. The plug of any preceding claim, provided in combination with a waste outlet.

ABSTRACT

STRAINER PLUG WASTE

5 A mechanically-actuable combined seal and strainer
plug 10 is provided. The plug 10 includes a length-
adjustable stem 20a, 20b, which carries a seal 28 and a
strainer 30. In use the strainer 30 is located above the
seal 28, to permit easy access and cleaning. The stem 20a,
10 20b is received in a waste outlet. The length of the stem
may be adjusted by exertion of force on a knob 32 on the
upper surface of the strainer 30; as the stem changes in
length, the seal 28 engages and disengages with a surface
of a waste outlet. When the seal 28 is disengaged, waste
15 water can flow through the outlet passing first through the
strainer 30 to remove solid particles.

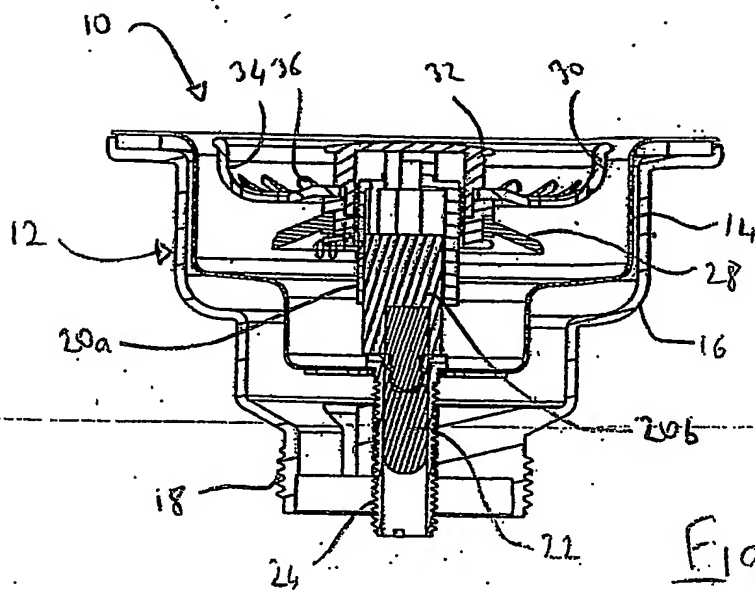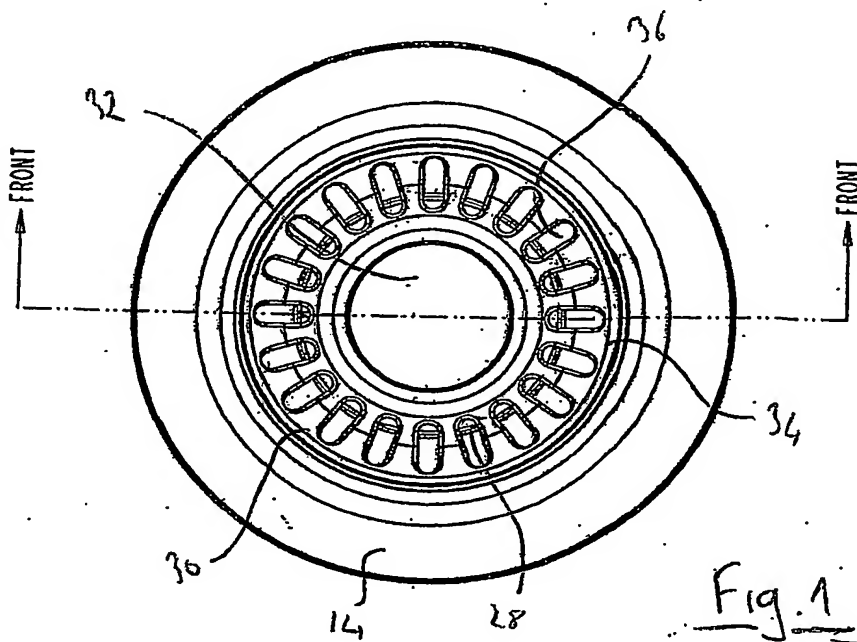

SECTION FRONT-FRONT

[illegible]


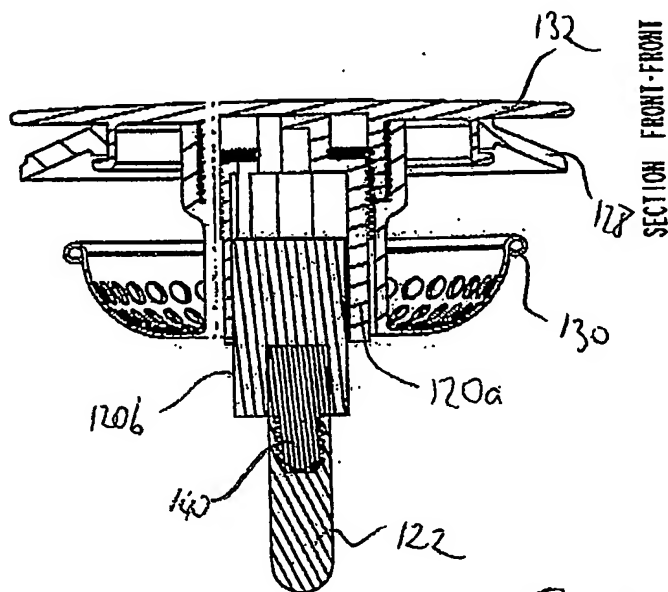


Fig. 3

ISSUE CONTROL		DATE	20-DEC-02	DRWN	DIMENSIONS IN MILLIMETERS		TYPE	P-PLUG-CL
LOC	DATE	CHK	JK	SCALE	1:500	TOLERANCES	UNLESS STATED OTHERWISE	MATERIAL
H	J	C	1	2	3	4	5	6
7	8	9	10	11	12	13	14	15
16	17	18	19	20	21	22	23	24
25	26	27	28	29	30	31	32	33
34	35	36	37	38	39	40	41	42
43	44	45	46	47	48	49	50	51
52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69
70	71	72	73	74	75	76	77	78
79	80	81	82	83	84	85	86	87
88	89	90	91	92	93	94	95	96
97	98	99	100	101	102	103	104	105
106	107	108	109	110	111	112	113	114
115	116	117	118	119	120	121	122	123
124	125	126	127	128	129	130	131	132
133	134	135	136	137	138	139	140	141
142	143	144	145	146	147	148	149	150
151	152	153	154	155	156	157	158	159
160	161	162	163	164	165	166	167	168
169	170	171	172	173	174	175	176	177
178	179	180	181	182	183	184	185	186
187	188	189	190	191	192	193	194	195
196	197	198	199	200	201	202	203	204
205	206	207	208	209	210	211	212	213
214	215	216	217	218	219	220	221	222
223	224	225	226	227	228	229	230	231
232	233	234	235	236	237	238	239	240
241	242	243	244	245	246	247	248	249
250	251	252	253	254	255	256	257	258
259	260	261	262	263	264	265	266	267
268	269	270	271	272	273	274	275	276
277	278	279	280	281	282	283	284	285
286	287	288	289	290	291	292	293	294
295	296	297	298	299	300	301	302	303
304	305	306	307	308	309	310	311	312
313	314	315	316	317	318	319	320	321
322	323	324	325	326	327	328	329	330
331	332	333	334	335	336	337	338	339
340	341	342	343	344	345	346	347	348
349	350	351	352	353	354	355	356	357
358	359	360	361	362	363	364	365	366
367	368	369	370	371	372	373	374	375
376	377	378	379	380	381	382	383	384
385	386	387	388	389	390	391	392	393
394	395	396	397	398	399	400	401	402
403	404	405	406	407	408	409	410	411
412	413	414	415	416	417	418	419	420
421	422	423	424	425	426	427	428	429
430	431	432	433	434	435	436	437	438
439	440	441	442	443	444	445	446	447
448	449	450	451	452	453	454	455	456
457	458	459	460	461	462	463	464	465
466	467	468	469	470	471	472	473	474
475	476	477	478	479	480	481	482	483
484	485	486	487	488	489	490	491	492
493	494	495	496	497	498	499	500	501
502	503	504	505	506	507	508	509	510
511	512	513	514	515	516	517	518	519
520	521	522	523	524	525	526	527	528
529	530	531	532	533	534	535	536	537
538	539	540	541	542	543	544	545	546
547	548	549	550	551	552	553	554	555
556	557	558	559	560	561	562	563	564
565	566	567	568	569	570	571	572	573
574	575	576	577	578	579	580	581	582
583	584	585	586	587	588	589	590	591
592	593	594	595	596	597	598	599	600
601	602	603	604	605	606	607	608	609
610	611	612	613	614	615	616	617	618
619	620	621	622	623	624	625	626	627
628	629	630	631	632	633	634	635	636
637	638	639	640	641	642	643	644	645
646	647	648	649	650	651	652	653	654
655	656	657	658	659	660	661	662	663
664	665	666	667	668	669	670	671	672
673	674	675	676	677	678	679	680	681
682	683	684	685	686	687	688	689	690
691	692	693	694	695	696	697	698	699
700	701	702	703	704	705	706	707	708
709	710	711	712	713	714	715	716	717
718	719	720	721	722	723	724	725	726
727	728	729	730	731	732	733	734	735
736	737	738	739	740	741	742	743	744
745	746	747	748	749	750	751	752	753
754	755	756	757	758	759	760	761	762
763	764	765	766	767	768	769	770	771
772	773	774	775	776	777	778	779	780
781	782	783	784	785	786	787	788	789
790	791	792	793	794	795	796	797	798
799	800	801	802	803	804	805	806	807
808	809	810	811	812	813	814	815	816
817	818	819	820	821	822	823	824	825
826	827	828	829	830	831	832	833	834
835	836	837	838	839	840	841	842	843
844	845	846	847	848	849	850	851	852
853	854	855	856	857	858	859	860	861
862	863	864	865	866	867	868	869	870
871	872	873	874	875	876	877	878	879
880	881	882	883	884	885	886	887	888
889	890	891	892	893	894	895	896	897
898	899	900	901	902	903	904	905	906
907	908	909	910	911	912	913	914	915
916	917	918	919	920	921	922	923	924
925	926	927	928	929	930	931	932	933
934	935	936	937	938	939	940	941	942
943	944	945	946	947	948	949	950	951
952	953	954	955	956	957	958	959	960
961	962	963	964	965	966	967	968	969
970	971	972	973	974	975	976	977	978
979	980	981	982	983	984	985	986	987
988	989	990	991	992	993	994	995	996
997	998	999	1000	1001	1002	1003	1004	1005
1006	1007	1008	1009	1010	1011	1012	1013	1014
1015	1016	1017	1018	1019	1020	1021	1022	1023
1024	1025	1026	1027	1028	1029	1030	1031	1032
1033	1034	1035	1036	1037	1038	1039	1040	1041
1042	1043	1044	1045	1046	1047	1048	1049	1050
1051	1052	1053	1054	1055	1056	1057	1058	1059
1060	1061	1062	1063	1064	1065	1066	1067	1068
1069	1070	1071	1072	1073	1074	1075	1076	1077
1078	1079	1080	1081	1082	1083	1084	1085	1086
1087	1088	1089	1090	1091	1092	1093	1094	1095
1096	1097	1098	1099	1100	1101	1102	1103	1104
1105	1106	1107	1108	1109	1110	1111	1112	1113
1114	1115	1116	1117	1118	1119	1120	1121	1122
1123	1124	1125	1126	1127	1128	1129	1130	1131
1132	1133	1134	1135	1136	1137	1138	1139	1140
1141	1142	1143	1144	1145	1146	1147	1148	1149
1150	1151	1152	1153	1154	1155	1156	1157	1158
1159	1160	1161	1162	1163	1164	1165	1166	1167
1168	1169	1170	1171	1172	1173	1174	1175	1176
1177	1178	1179	1180	1181	1182	1183	1184	1185
1186	1187	1188	1189	1190	1191	1192	1193	1194
1195	1196	1197	1198	1199	1200	1201	1202	1203
1204	1205	1206	1207	1208	1209	1210	1211	1212
1213	1214							

PCT/GB2004/002063

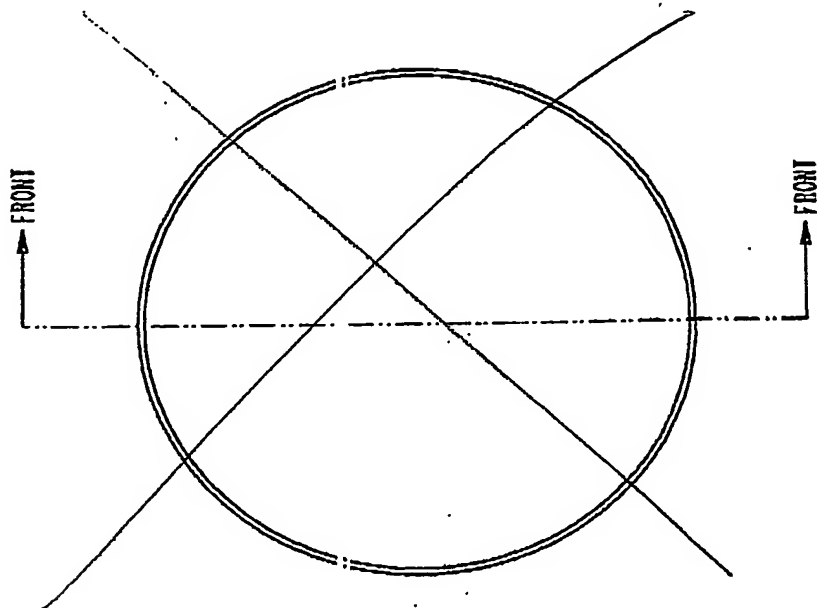

This Page is inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images
problems checked, please do not report the
problems to the IFW Image Problem Mailbox**